



TRIME Lighting Tower Specialist





X-ECO- LED 4 4x160W 48V LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-ECO has been created beginning from these characteristics. It is the best solution to your needs and guarantees 3300 sqm of illuminated area. 14 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.











110(l) - 0,55 (l/h)



- 4x150W, 48V LED lights
- 48V power between the generator and the lights
- 7 sections hydraulic vertical tower 8,5 m, 340° rotatable

• Multi-directionally adjustable and tiltable floodlights

- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 14 units per truck
- Central lifting eye, longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine proteciton and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up tp 110 km/h
- 4 height adjustable stabilizers
- On board levels for guidance during stabilization
- Amoss safety breake

- Transport costs Reduced by 45% 14 Lighting Towers on a truck
- 45% Reduction in Yard Space
- Kubota 1500 rpm 2 cyl water cooled diesel engine c/w 2 years warranty
- LED lamps mean NO replacement of
 - bulbs
 - · lamp glass
 - ballast
 - capacitors Reducing Call Out Costs
- LED Flood Light guaranteed for 50.000 hours
- Vertical must with Life time warranty



Ease of transport and handling



14 Units Per Truck



You can place 14 units on a single vehicle thanks to one of the compactest footprints on the market.



technical data

Dimensions & weight	
Dimensions min. (mm)	2320x1380x2420
Dimensions max. (mm)	2320x1550x8500
Total weight without fuel	910Kg
Features	
Rotation	340°
Floodlights	4x160W
Lamps	LED
Options	Timer

Engine	
Model	Kubota Z482
Fuel	Diesel
r.p.m	1500
Tank capacity (I)	110
Running time (h)	200
Noise level (dBA) at 7m	65
Fuel Consumption	0,55 l/h

Alternator	
Model	Synchronous
Frequency (Hz)	50
Insulation class	Н
Degree of protection	IP23

14 sets			

1,5 kVA Units Per Truck


Standard load delivery


Illuminated area

Single phase voltage
Auxiliary outlets

3300 sqm

3,5 kVA - 230V

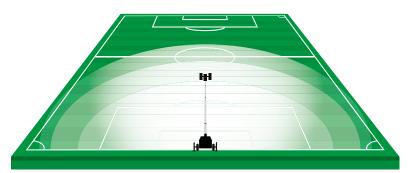



Headings	Standard Lighting Tower	X-ECO Lighting Tower	Monthly Savings when using X-ECO Light Tower
Fuel usage	1,93 l/h	0,55 l/h	1,38 l/h
Fuel costs per month	€ 550,00	€ 150,00	€ 400,00
CO'2 Omissionmonth	1.224 kg	336 kg	888 kg
Run time on full tank	60 h	200 h	140 h
Lamp type	Metal halide	LED	
Light sensor	Optional	Standard	
Amoss kit	Optional	Standard	

narcovitidesian



Эксклюзивный официальный дистрибьютор TRIME на территории России и СНГ

+7 (495) 532-37-34 | +7 (925) 741-89-01 8 (800) 222-51-05 (Бесплатно для всех регионов)

www.legion-tehno.ru | trime@legion-tehno.ru